


SIEMENS PLC SIMATIC S7-1500 DQ 32X24VDC/0.5A BA (25 MM) 6ES7522-1BL10-0AA0 SAFETY-ORIENTED SHUTDOWN OF LOAD GROUPS UP TO

Basic Information

- Place of Origin: Germany
- Brand Name: SIEMENS
- Certification: CE
- Model Number: DQ 32x24VDC/0.5A BA (25 mm) 6ES7522-1BL10-0AA0
- Minimum Order Quantity: 1
- Price: USD
- Packaging Details: 15,10 x 15,40 x 4,60
- Delivery Time: 10-12Days
- Payment Terms: L/C, T/T
- Supply Ability: 100

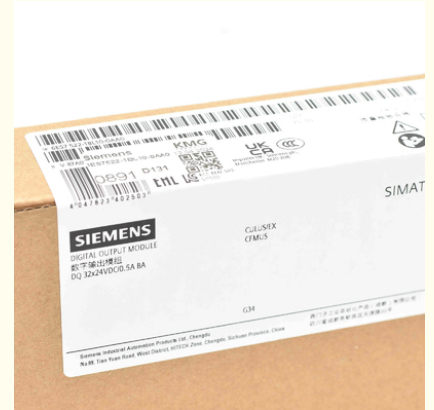

Product Specification

- Memory Capacity: Up To 5 MB
- Cpu Type: S7-1500
- Power Supply: 24 V DC
- Number Of Digital Inputs: Up To 64
- Protection Rating: IP20
- Certifications: CE, UL, CSA, KC, Etc.
- Number Of Digital Outputs: Up To 64
- Number Of Analog Inputs: Up To 32
- Number Of I/O Modules: Up To 32
- Number Of Analog Outputs: Up To 32
- Operating Temperature: -20 To +60 Degrees Celsius



Product Description

SIEMENS PLC SIMATIC S7-1500 DQ 32X24VDC/0.5A BA (25 MM) 6ES7522-1BL10-0AA0 SAFETY-ORIENTED SHUTDOWN OF LOAD

Product Introduction:

The SIEMENS PLC SIMATIC S7-1500 "DQ 32X24VDC/0.5A BA (25 MM)" 6ES7522-1BL10-0AA0 is a digital output module designed for the SIEMENS SIMATIC S7-1500 series. It features 32 digital output channels capable of controlling devices operating at 24VDC, with a maximum current rating of 0.5A per channel. This module is equipped with a detachable front connector (25 MM) for easy installation and maintenance.

Product Information and Specifications:

- Model: DQ 32X24VDC/0.5A BA (25 MM) 6ES7522-1BL10-0AA0

- Digital Outputs: 32 channels

- Output Voltage: 24VDC

- Maximum Current per Channel: 0.5A

- Front Connector: Detachable front connector (25 MM)

Product Attributes:

- Model: DQ 32X24VDC/0.5A BA (25 MM) 6ES7522-1BL10-0AA0

- Digital Outputs: 32 channels

- Output Voltage: 24VDC

- Maximum Current per Channel: 0.5A

- Front Connector: Detachable front connector (25 MM)


The module is safety-oriented and supports safety-related applications. It is capable of initiating a safety-oriented shutdown of connected loads. This means that it can trigger a safety response or shut down the specific connected devices or processes to ensure the safety of personnel and equipment.

To obtain detailed information about the safety-oriented features, safety certifications, and guidelines for using this module in safety-critical applications, it is recommended to refer to the product documentation provided by Siemens or consult their technical support. They can provide specific information regarding the safety features and capabilities of the module, including the safety-oriented shutdown functionality for connected loads, to ensure its proper and safe use in your application.

Product	
Article Number (Market Facing Number)	6ES7522-1BL10-0AA0
Product Description	SIMATIC S7-1500, digital output module, DQ32xDC 24V/0.5A BA, 32 channels in groups of 8, 4 A per group; the module supports the safety-oriented shutdown of load groups up to SIL2 according to EN IEC 62061:2021 and Category 3 / PL d according to EN ISO 13849-1:2015. delivery incl. front connector push-in
Product family	SM 522 digital output modules
Product Lifecycle (PLM)	PM300:Active Product
Price data	
Region Specific PriceGroup / Headquarter Price Group	219 / 219
List Price	Show prices
Customer Price	Show prices
Surcharge for Raw Materials	None
Metal Factor	None
Delivery information	
Export Control Regulations	AL : N / ECCN : 9N9999
Estimated dispatch time (Working Days)	1 Day/Days
Net Weight (kg)	0,360 Kg
Packaging Dimension	15,40 x 20,40 x 4,00
Package size unit of measure	CM
Quantity Unit	1 Piece
Packaging Quantity	1
Additional Product Information	
EAN	4047623402503
UPC	887621779054
Commodity Code	85389091
LKZ_FDB/CatalogID	ST73
Product Group	4501
Group Code	R151
Country of origin	Germany

Compliance with the substance restrictions according to RoHS directive	Since: 21.10.2013	
Product class	A: Standard product which is a stock item could be returned within the returns guidelines/period.	
WEEE (2012/19/EU) Take-Back Obligation	Yes	
REACH Art. 33 Duty to inform according to the current list of candidates	Lead CAS-No. 7439-92-1 > 0, 1 % (w / w)	
	Lead monoxide (lead ... CAS-No. 1317-36-8 > 0, 1 % (w / w)	
	Silicic acid, lead s... CAS-No. 11120-22-2 > 0, 1 % (w / w)	
	4,4'-isopropylidened... CAS-No. 80-05-7 > 0, 1 % (w / w)	
	2-methyl-1-(4-methyl... CAS-No. 71868-10-5 > 0, 1 % (w / w)	
SCIP number	36fd591b-0e2d-414c-a569-47ac9b69b043	



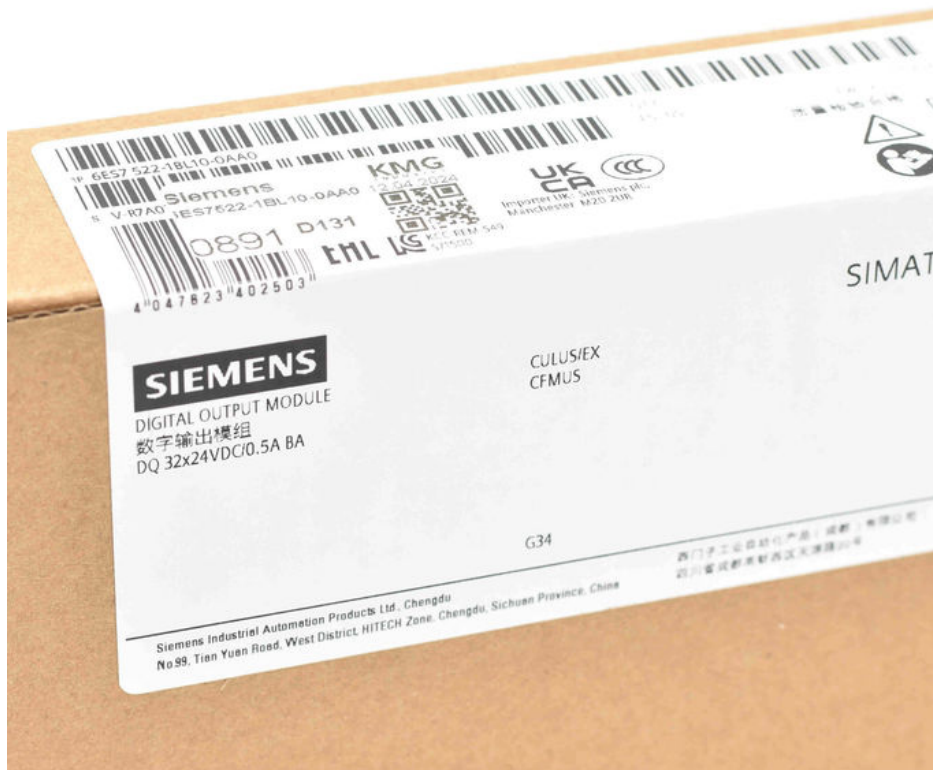

Shenzhen Voboal Industrial Automation Co., Ltd.



+8613760462017



sale@voboal.com



plcsimatic.com

Sienteng Zhongbao Industrial Park, Longdong Community, Baolong Street, Longgang District, Shenzhen