


SIEMENS 3RW3046-1BB04 SIRIUS soft starter S3 80 A, 45 kW/400 V, 40 °C 200-480 V AC, 24 V AC/DC Screw terminals

Basic Information

- Place of Origin: Germany
- Brand Name: SIEMENS
- Certification: CE
- Model Number: 3RW3046-1BB04
- Minimum Order Quantity: 1
- Price: USD
- Packaging Details: 15,10 x 15,40 x 4,60
- Delivery Time: 10-12Days
- Payment Terms: L/C, T/T
- Supply Ability: 100

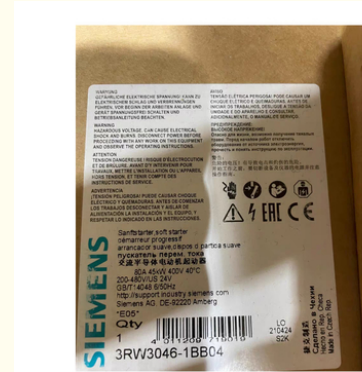

Product Specification

- Ramp-Up Time: 0-30 Seconds
- Operating Temperature Range: -25 To 60 Degrees Celsius
- Control Modes: Soft Start, Soft Stop, Kick Start, Pump Control
- Motor Power Range: 1.5-560 KW
- Ramp-Down Time: 0-30 Seconds
- Control Voltage: 24 V DC
- Voltage Range: 200-690 V
- Communication Interfaces: PROFIBUS, PROFINET, Modbus RTU, Modbus TCP, Ethernet/IP
- Display: LCD With Backlight
- Starting Time: 0-20 Seconds
- Certifications: CE, UL, CUL, CCC, GOST, EAC
- Enclosure Rating: IP20
- Current Range: 3-1050 A

Product Description

SIEMENS 3RW3046-1BB04 SIRIUS soft starter S3 80 A, 45 kW/400 V, 40 °C 200-480 V AC, 24 V AC/DC Screw terminals
The SIEMENS 3RW3046-1BB04 SIRIUS Soft Starter S3 is a motor control device used for starting and controlling the speed of three-phase induction motors. Here are the details about the SIEMENS 3RW3046-1BB04 SIRIUS Soft Starter S3:

1. Model: The 3RW3046-1BB04 is a specific model of the SIRIUS Soft Starter S3 series.
 2. Current Rating: The soft starter has a current rating of 80 A, which means it can handle motors with a maximum current draw of 80 Amperes.
 3. Power Rating: The soft starter is designed for motors with a power rating of 45 kW at 400 V AC. This means it can control motors up to 45 kilowatts of power.
 4. Voltage Range: The soft starter supports a voltage range of 200-480 V AC for the main supply. Additionally, it requires a control voltage of 24 V AC or DC.
 5. Terminal Type: The soft starter features screw terminals for easy and secure connection of electrical wiring.
- The SIEMENS 3RW3046-1BB04 SIRIUS Soft Starter S3 is commonly used in industrial applications to smoothly start and control the speed of motors, reducing mechanical stress and preventing high inrush currents. It offers protection features such as motor overload protection, phase asymmetry detection, and phase failure protection.
- For more detailed specifications, installation guidelines, and specific information about the SIEMENS 3RW3046-1BB04 SIRIUS Soft Starter S3, it is recommended to refer to the official documentation provided by Siemens or contact their technical support for accurate and up-to-date information based on your requirements.

Product	
Article Number (Market Facing Number)	3RW3046-1BB04
Product Description	SIRIUS soft starter S3 80 A, 45 kW/400 V, 40 °C 200-480 V AC, 24 V AC/DC Screw terminals
Product family	3RW30 soft starters
Product Lifecycle (PLM)	PM300:Active Product
Price data	
Region Specific PriceGroup / Headquarter Price Group	42G / 42G
List Price	Show prices
Customer Price	Show prices
Surcharge for Raw Materials	None
Metal Factor	LBO-----
Delivery information	
Export Control Regulations	AL : N / ECCN : N
Estimated dispatch time (Working Days)	3 Day/Days
Net Weight (kg)	1,706 Kg
Packaging Dimension	85,00 x 219,00 x 180,00
Package size unit of measure	MM
Quantity Unit	1 Piece
Packaging Quantity	1
Additional Product Information	
EAN	4011209719019
UPC	040892691917
Commodity Code	85371098
LKZ_FDB/ CatalogID	CC-IC10
Product Group	5345
Group Code	R711
Country of origin	Czech Republic



Shenzhen Voboal Industrial Automation Co., Ltd.



+8613760462017



sale@voboal.com



plcsimatic.com

Sienteng Zhongbao Industrial Park, Longdong Community, Baolong Street, Longgang District, Shenzhen