

SIEMENS 6ES7193-0CB20-0XA0 SIMATIC S5/S7, TERMINAL BLOCK

Our Product Introduction

Basic Information

- Place of Origin: Germany
- Brand Name: SIEMENS
- Certification: CE
- Model Number: 6ES7193-0CB20-0XA0
- Minimum Order Quantity: 1
- Price: USD
- Packaging Details: 15,10 x 15,40 x 4,60
- Delivery Time: 10-12Days
- Payment Terms: L/C, T/T
- Supply Ability: 100



Product Specification

- Operating Temperature: -20°C To +60°C
- Dimensions: 130 X 125 X 120 Mm
- Number Of Digital Outputs: 16/32/64/128/256
- Number Of Analog Outputs: 4/8
- Programming Software: STEP 7 Professional V15
- Communication Protocols: PROFINET/PROFIBUS/Modbus TCP/EtherNet/IP
- Number Of Communication Interfaces: 2/4/8
- Programming Languages: Ladder Diagram (LAD)/Function Block Diagram (FBD)/Structured Control Language (SCL)/Graphical (S7-GGRAPH)
- Cpu Type: S7-1500
- Number Of Digital Inputs: 16/32/64/128/256
- Weight: 0.8 Kg
- Number Of Analog Inputs: 8/16

for more products please visit us on plcsimatic.com

Product Description

SIEMENS 6ES7193-0CB20-0XA0 SIMATIC S5/S7, TERMINAL BLOCK

The SIEMENS 6ES7193-0CB20-0XA0 is a terminal block that is compatible with both the SIMATIC S5 and SIMATIC S7 automation systems. Here are the key details about this terminal block:

Product Description:

- The 6ES7193-0CB20-0XA0 is a universal terminal block that can be used with both SIMATIC S5 and SIMATIC S7 I/O systems.

- It provides a standard interface for connecting field wiring to the I/O modules.

Connectivity:

- The terminal block has 20 connection points for wiring.

- It supports both DC and AC powered I/O modules.

Mounting:

- The terminal block mounts directly onto the SIMATIC S5 or S7 I/O module.

- It provides a secure and reliable connection to the automation system.

Wiring:

- The terminal block features push-in terminals for the wiring connections.

- This allows for fast and tool-free wiring of field devices and signals.

Compatibility:

- Can be used with both SIMATIC S5 and SIMATIC S7 I/O modules.

- Provides a common interface between the two automation systems.

Other Details:


- Part of the SIMATIC automation system accessories.

- Supports a wide range of I/O modules in the S5 and S7 portfolios.

- Enables easy migration between S5 and S7 systems.

In summary, the SIEMENS 6ES7193-0CB20-0XA0 is a versatile 20-point terminal block with push-in terminals that can be used with both SIMATIC S5 and SIMATIC S7 I/O modules. It provides a standardized wiring interface for connecting field devices to the automation systems.

Supply voltage	
Rated value (DC)	24 V
permissible range, lower limit (DC)	18.5 V; Ripple included
permissible range, upper limit (DC)	30 V; Ripple included
Input current	
Current consumption, typ.	100 mA
Current consumption, max.	200 mA
Potential separation	
between electronic block and PROFIBUS DP	Yes
Ambient conditions	
Ambient temperature during operation	
● min.	0 °C
● max.	60 °C
Connection method	
Design of electrical connection for the inputs and outputs	TB2: screw-type terminals; TB4: spring-loaded terminals
Dimensions	
Width	235 mm
Height	130 mm
Depth	59 mm
Weights	

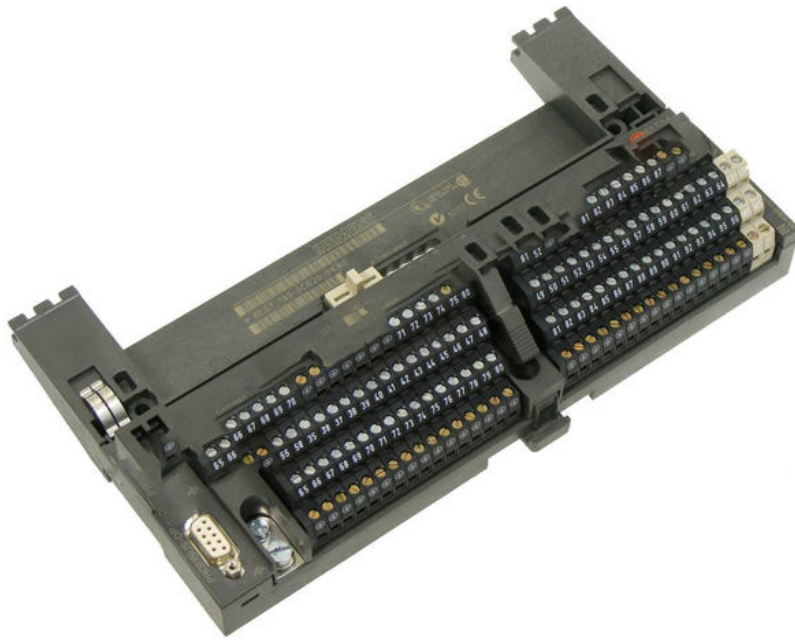

Shenzhen Voboal Industrial Automation Co., Ltd.



+8613760462017



sale@voboal.com



plcsimatic.com

Sienteng Zhongbao Industrial Park, Longdong Community, Baolong Street, Longgang District, Shenzhen