


SIEMENS 6ES7193-0CC10-0XA0 SIMATIC S5/S7, TERMINAL BLOCK

Our Product Introduction

Basic Information

- Place of Origin: Germany
- Brand Name: SIEMENS
- Certification: CE
- Model Number: 6ES7193-0CC10-0XA0
- Minimum Order Quantity: 1
- Price: USD
- Packaging Details: 15,10 x 15,40 x 4,60
- Delivery Time: 10-12Days
- Payment Terms: L/C, T/T
- Supply Ability: 100

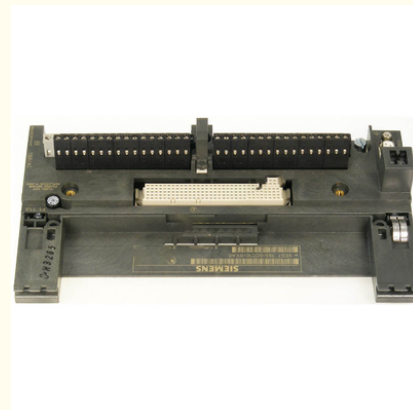

Product Specification

- Number Of Communication Modules: 8
- Number Of Integrated Functions: 32
- Cpu Type: S7-1500
- Dimensions: 130 X 125 X 130 Mm
- Number Of Analog Outputs: 8
- Communication Protocols: PROFINET, PROFIBUS, Modbus TCP, TCP/IP
- Programming Languages: Ladder Logic, Function Block Diagram, Structured Text, SCL
- Operating Temperature Range: -20°C To +60°C
- Number Of Analog Inputs: 8
- Number Of Technology Modules: 32
- Number Of Motion Control: 128

for more products please visit us on plcsimatic.com

Product Description

SIEMENS 6ES7193-0CC10-0XA0 SIMATIC S5/S7, TERMINAL BLOCK

The SIEMENS 6ES7193-0CC10-0XA0 is a terminal block that is compatible with both the SIMATIC S5 and SIMATIC S7 automation systems. Here are the key details about this terminal block:

Product Description:

- The 6ES7193-0CC10-0XA0 is a universal terminal block that can be used with both SIMATIC S5 and SIMATIC S7 I/O systems.

- It provides a standard interface for connecting field wiring to the I/O modules.

Connectivity:

- The terminal block has 10 connection points for wiring.

- It supports both DC and AC powered I/O modules.

- The connection points have screw terminals rather than push-in terminals.

Mounting:

- The terminal block mounts directly onto the SIMATIC S5 or S7 I/O module.

- It provides a secure and reliable connection to the automation system.

Wiring:

- The terminal block features screw terminals for the wiring connections.

- This allows for a more secure and permanent wiring connection compared to push-in terminals.

Compatibility:

- Can be used with both SIMATIC S5 and SIMATIC S7 I/O modules.

- Provides a common interface between the two automation systems.

Other Details:


- Part of the SIMATIC automation system accessories.

- Supports a wide range of I/O modules in the S5 and S7 portfolios.

- Enables easy migration between S5 and S7 systems.

In summary, the SIEMENS 6ES7193-0CC10-0XA0 is a versatile 10-point terminal block with screw terminals that can be used with both SIMATIC S5 and SIMATIC S7 I/O modules. It provides a standardized wiring interface for connecting field devices to the automation systems.

Supply voltage	
Rated value (AC)	120/230 V AC
permissible range, lower limit (AC)	85 V; Ripple included
permissible range, upper limit (AC)	264 V; Ripple included
Input current	
Current consumption, typ.	60 mA
Current consumption, max.	210 mA
Potential separation	
between electronic block and PROFIBUS DP	Yes
Degree and class of protection	
Degree of protection acc. to EN 60529	IP20
Ambient conditions	
Ambient temperature during operation	
● min.	0 °C
● max.	60 °C
Connection method	
Design of electrical connection for the inputs and outputs	Screw terminals
Dimensions	
Width	235 mm
Height	130 mm
Depth	59 mm

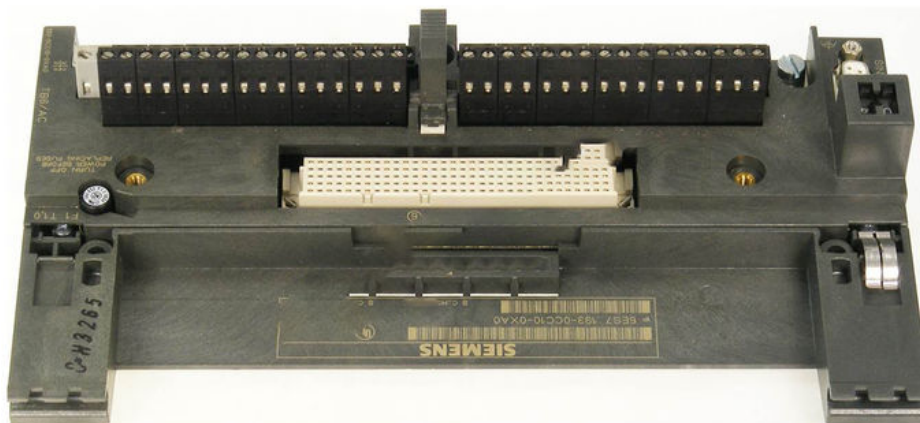

Shenzhen Voboal Industrial Automation Co., Ltd.



+8613760462017



sale@voboal.com



plcsimatic.com

Sienteng Zhongbao Industrial Park, Longdong Community, Baolong Street, Longgang District, Shenzhen