


## SIEMENS 6EP1333-2BA20 SITOP PSU100S 24 V/5 A STABILIZED POWER SUPPLY INPUT: 120/230 V AC OUTPUT: 24 V DC/5 A

### Our Product Introduction

#### Basic Information

- Place of Origin: Austria
- Brand Name: SIEMENS
- Certification: CE
- Model Number: 6EP1333-2BA20
- Minimum Order Quantity: 1
- Price: USD
- Packaging Details: 14,00 x 13,00 x 6,00CM
- Delivery Time: 10-12Days
- Payment Terms: L/C, T/T
- Supply Ability: 100PS



#### Product Specification

- Protection Class: IP20
- Input Voltage Range: 85-264 V AC, 90-375 V DC
- Series: SITOP PSU8600
- Mounting: DIN Rail
- Cooling Method: Convection
- Model: SITOP
- Output Voltage: 24 V DC
- Humidity: 5-95%
- Input Voltage: 3 AC 400-500 V
- Number Of Outputs: 1
- Mounting Type: DIN Rail
- Output Voltage Range: 24 V DC
- Power: 120W
- Protection: IP20
- Rated Power: 40 A

## Product Description

SIEMENS 6EP1333-2BA20 SITOP PSU100S 24 V/5 A STABILIZED POWER SUPPLY INPUT: 120/230 V AC OUTPUT: 24 V DC/5 A

The Siemens 6EP1333-2BA20 is a SITOP PSU100S stabilized power supply unit that provides a 24 V DC output at 5 A. It is designed for a wide range of industrial and commercial applications.

Key details about the Siemens 6EP1333-2BA20 SITOP PSU100S power supply:

### 1. Overview:

- The 6EP1333-2BA20 is a SITOP PSU100S stabilized power supply unit from Siemens.
- It is a single-phase power supply that takes an input of 120/230 V AC and provides a 24 V DC output at 5 A.
- The SITOP PSU100S power supply is designed for industrial and commercial applications, offering reliable and efficient power conversion.

### 2. Technical Specifications:

- Input voltage: 120/230 V AC (wide-range input)
- Output voltage: 24 V DC
- Output current: 5 A
- Output power: 120 W
- Dimensions (W x H x D): 50 mm x 90 mm x 55 mm
- Mounting: DIN rail mounting or screw mounting

### 3. Features and Benefits:

- Wide-range input voltage (120/230 V AC) for global usability
- Stabilized 24 V DC output with 5 A current capacity
- High efficiency and low power loss for energy-saving operation
- Compact and space-saving design suitable for industrial and commercial environments
- DIN rail or screw mounting options for flexible installation
- Overcurrent, overload, and overtemperature protection
- Remote monitoring and control capabilities (optional)

### 4. Applications:

- The Siemens 6EP1333-2BA20 SITOP PSU100S power supply is suitable for a wide range of industrial and commercial applications, including:
  - Automation and control systems
  - Machine tools and manufacturing equipment
  - Industrial computers and displays
  - Building automation and security systems
  - Lighting and signage
- Any application requiring a reliable 24 V DC power source up to 5 A

### 5. Integration and Configuration:

- The SITOP PSU100S power supply is designed for easy integration into various systems and environments.
- It can be easily mounted on a DIN rail or using screw mounting, and connected to the input power and 24 V DC load.
- Optional remote monitoring and control capabilities allow for advanced configuration and diagnostics through various communication interfaces.


### 6. Certifications and Approvals:

- The Siemens 6EP1333-2BA20 SITOP PSU100S power supply is designed to meet relevant safety and quality standards for industrial and commercial applications, including CE, UL, and other certifications.
- Additional certifications may be available based on specific regional or application requirements.

Please let me know if you need any further details or have any other questions about this Siemens SITOP PSU100S stabilized power supply.

Product	
Article Number	6EP1333-2BA20
Product Description	SITOP PSU100S 24 V/5 A stabilized power supply input: 120/230 V AC output: 24 V DC/5 A
Product family	<a href="#">1-phase, 24 V DC</a>
Product Lifecycle (PLM)	PM300:Active Product
Price data	
Price Group	582
List Price	<a href="#">Show prices</a>
Customer Price	<a href="#">Show prices</a>
Surcharge for Raw Material	see also metal factor (further details are available on the help page)
Metal Factor	see also metal factor (further details are available on the help page)
Delivery information	
Export Control Regulations	AL : N / ECCN : N
Estimated dispatch time (Working Days)	1 Day(s)
Net Weight (kg)	0,400 Kg
Packaging Dimension	14,00 x 13,00 x 6,00

Package size unit of measure	CM
Quantity Unit	1 Piece
Packaging Quantity	1
Additional Product Information	
EAN	4025515153481
UPC	887621038632
Commodity Code	85044083
LKZ_FDB/ CatalogID	KT10-PE
Product Group	4207
Group Code	R315
Country of origin	Austria

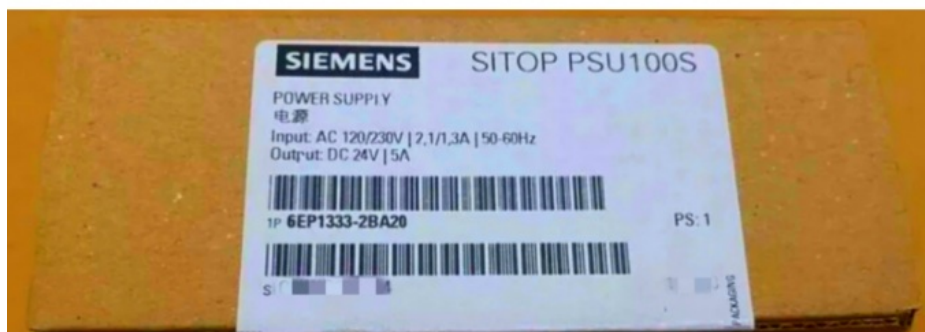

**Shenzhen Voboal Industrial Automation Co., Ltd.**



+8613760462017



sale@voboal.com



plcsimatic.com

Sienteng Zhongbao Industrial Park, Longdong Community, Baolong Street, Longgang District, Shenzhen