


SIEMENS 3RW3003-2CB54 SIRIUS SOFT STARTER 22.5MM 3 A, 1.1 KW/400 V, 40 °C 200-400 V AC, 24-230 V AC/DC SPRING-TYPE

Basic Information

- Place of Origin: Germany
- Brand Name: SIEMENS
- Certification: CE
- Model Number: 3RW3003-2CB54
- Minimum Order Quantity: 1
- Price: USD
- Packaging Details: 28,00 x 106,50 x 124,00MM
- Delivery Time: 10-12Days
- Payment Terms: L/C, T/T
- Supply Ability: 100

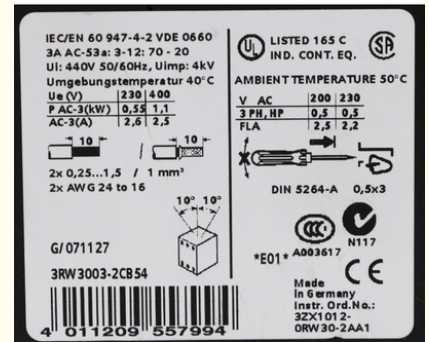

Product Specification

- Ambient Temperature Range: -25°C To +60°C
- Overload Protection: Class 10
- Voltage Range: 200-690V
- Rated Motor Power: Up To 630 KW
- Communication Interface: Modbus RTU
- Programming Software: SIRIUS Soft Starter ES
- Ramp Time: 0.1-30 Seconds
- Model: 3RW Soft Starters
- Rated Operational Current: 3-85 A
- Soft Start: Ramp-up Time
- Efficiency: 90%
- Programming: Multi-language
- Weight: Depends On Model
- Output Voltage: 24V DC

Product Description

SIEMENS 3RW3003-2CB54 SIRIUS SOFT STARTER 22.5MM 3 A, 1.1 KW/400 V, 40 °C 200-400 V AC, 24-230 V AC/DC SPRING-TYPE

The **SIEMENS 3RW3003-2CB54 SIRIUS SOFT STARTER** is a compact motor control device suitable for small motor applications in industrial settings. This soft starter is rated for 3 A, 1.1 kW at 400 V and can operate at temperatures up to 40°C. It is compatible with input voltages ranging from 200 V to 400 V AC and 24-230 V AC/DC with spring-type terminals for connections.

Soft starters like the SIRIUS 3RW3003-2CB54 are used to control the starting and stopping of electric motors, reducing the stress on the motor during startup and ensuring a controlled acceleration process. They find common applications in various industrial settings to enhance motor performance and efficiency.

Product	
Article Number	3RW3003-2CB54
Product Description	SIRIUS soft starter 22.5mm 3 A, 1.1 kW/400 V, 40 °C 200-400 V AC, 24-230 V AC/DC spring-type terminals
Product family	3RW30 soft starters
Product Lifecycle (PLM)	PM400:Phase Out Started
PLM Effective Date	Product phase-out since: 01.10.2022
Price data	
Price Group	42G
List Price	Show prices
Customer Price	Show prices
Surcharge for Raw Material	see also metal factor (further details are available on the help page)
Metal Factor	LBO-----
Delivery information	
Export Control Regulations	AL : N / ECCN : N
Estimated dispatch time (Working Days)	3 Day(s)
Net Weight (kg)	0,200 Kg
Packaging Dimension	28,00 x 106,50 x 124,00
Package size unit of measure	MM
Quantity Unit	1 Piece
Packaging Quantity	1
Additional Product Information	
EAN	4011209557994
UPC	887621408572
Commodity Code	85371098
LKZ_FDB/ CatalogID	CC-IC10
Product Group	3718
Group Code	R711
Country of origin	Germany

IEC/EN 60 947-4-2 VDE 0660
 3A AC-53a: 3-12: 70 - 20
 UI: 440V 50/60Hz, Uimp: 4kV
 Umgebungstemperatur 40°C

Ue (V)	230	400
P AC-3(kW)	0,55	1,1
AC-3(A)	2,6	2,5

2x 0,25...1,5 / 1 mm²
 2x AWG 24 to 16

10° 10°

G/071127
 3RW3003-2CB54

4 011209 557994

UL LISTED 165 C
 IND. CONT. EQ.

SA

AMBIENT TEMPERATURE 50°C

V AC	200	230
3 PH, HP	0,5	0,5
FLA	2,5	2,2

DIN 5264-A 0,5x3

E01 A003617

N117

CE

Made
 in Germany
 Instr. Ord.No.:
 3ZX1012-
 0RW30-2AA1

VOBOAL Shenzhen Voboal Industrial Automation Co., Ltd.

+8613760462017

sale@voboal.com

plcsimatic.com

Sienteng Zhongbao Industrial Park, Longdong Community, Baolong Street, Longgang District, Shenzhen