


SIEMENS 3RW4026-2TB04 SIRIUS SOFT STARTER S0 25 A, 11 KW/400 V, 40 °C 200-480 V AC, 24 V AC/DC SPRING-TYPE TERMINALS

Basic Information

- Place of Origin: Czech Republic
- Brand Name: SIEMENS
- Certification: CE
- Model Number: 3RW4026-2TB04
- Minimum Order Quantity: 1
- Price: USD
- Packaging Details: 60,00 x 155,00 x 182,00MM
- Delivery Time: 10-12Days
- Payment Terms: L/C, T/T
- Supply Ability: 100

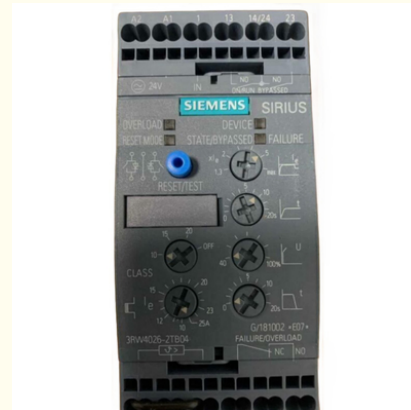

Product Specification

- Voltage: Up To 690V
- Ambient Temperature Range: -25 To 60 °C
- Display: LCD
- Cooling Method: Natural Convection
- Motor Protection: Thermal Overload Relay
- Braking Torque: Adjustable
- Certifications: CE/CUL/CCC
- Soft Start Function: Ramp-up, Kickstart, Pump Control
- Input Voltage: 120-230V AC
- Protection Functions: Thermal Overload/Phase Failure/Phase Sequence/Underload
- Rated Motor Power: Up To 630 KW
- Programming Software: SIRIUS Soft Starter ES
- Parameter Copy Function: Yes
- Stop Function: Coast To Stop

Product Description

SIEMENS 3RW4026-2TB04 SIRIUS SOFT STARTER S0 25 A, 11 kW/400 V, 40 °C 200-480 V AC, 24 V AC/DC SPRING-TYPE TERMINALS

The **SIEMENS 3RW4026-2TB04 SIRIUS SOFT STARTER S0** is a soft starter device with the following specifications:

- **Model:** 3RW4026-2TB04
- **Product Name:** SIRIUS SOFT STARTER S0
- **Rated Current:** 25A
- **Rated Power:** 11 kW at 400V, 40°C
- **Input Voltage Range:**
 - 200-480V AC
 - 24V AC/DC
- **Connection Type:** Spring-type terminals

This soft starter is designed to facilitate the smooth starting and control of the acceleration of electric motors. It can manage a rated current of 25A and a power of 11 kW at 400V and 40°C. The input voltage range is between 200-480V AC and 24V AC/DC, and it features spring-type terminals for convenient and secure connections.

Product	
Article Number	3RW4026-2TB04
Product Description	SIRIUS soft starter S0 25 A, 11 kW/400 V, 40 °C 200-480 V AC, 24 V AC/DC spring-type terminals Thermistor motor protection
Product family	3RW40 soft starters
Product Lifecycle (PLM)	PM300:Active Product
Price data	
Price Group	42G
List Price	Show prices
Customer Price	Show prices
Surcharge for Raw Material	see also metal factor (further details are available on the help page)
Metal Factor	LAO-----
Delivery information	
Export Control Regulations	AL : N / ECCN : EAR99
Estimated dispatch time (Working Days)	5 Day(s)
Net Weight (kg)	0,750 Kg
Packaging Dimension	60,00 x 155,00 x 182,00
Package size unit of measure	MM
Quantity Unit	1 Piece
Packaging Quantity	1
Additional Product Information	
EAN	4011209694118
UPC	195125182141
Commodity Code	85371098
LKZ_FDB/ CatalogID	CC-IC10
Product Group	3727
Group Code	R711
Country of origin	Czech Republic



Shenzhen Voboal Industrial Automation Co., Ltd.

+8613760462017

sale@voboal.com

plcsimatic.com

Sienteng Zhongbao Industrial Park, Longdong Community, Baolong Street, Longgang District, Shenzhen