


SIEMENS 3RW4027-2TB05 SIRIUS SOFT STARTER S0 32 A, 18.5 K KW/500 V, 40 °C 400-600 V AC, 24 V AC/DC SPRING-TYPE

Basic Information

- Place of Origin: Czech Republic
- Brand Name: SIEMENS
- Certification: CE
- Model Number: 3RW4027-2TB05
- Minimum Order Quantity: 1
- Price: USD
- Packaging Details: 210,00 x 183,00 x 58,00MM
- Delivery Time: 10-12Days
- Payment Terms: L/C, T/T
- Supply Ability: 100

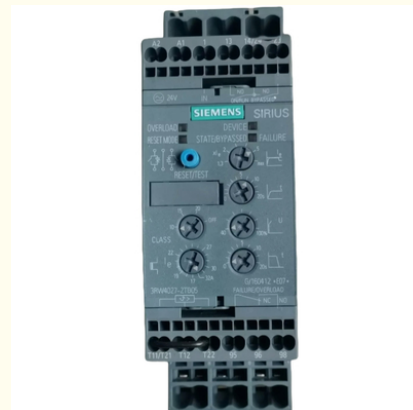

Product Specification

- Ambient Temperature Range: -10 To 40 Degrees Celsius
- Energy Saving Function: Automatic Voltage Reduction
- Power Range: 3 KW To 1200 KW
- Rated Operational Voltage: Up To 690V
- Software Tools: SIRIUS Soft Starter ES V15.1 Or Higher
- Display: LCD/LED
- Braking Torque: Adjustable
- Communication: PROFIBUS, PROFINET, Modbus RTU
- Fault Memory: Last 10 Faults Stored
- Current Range: 3-1050A
- Output Current: 5A
- Starting Voltage: Adjustable From 20-100%
- Additional Features: Overload And Short Circuit Protection
- Operating Temperature: -25 To 70°C

Product Description

SIEMENS 3RW4027-2TB05 SIRIUS SOFT STARTER S0 32 A, 18.5 K KW/500 V, 40 °C 400-600 V AC, 24 V AC/DC SPRING-TYPE

The **SIEMENS 3RW4027-2TB05 SIRIUS SOFT STARTER S0** is a soft starter device with the following specifications:

- **Model:** 3RW4027-2TB05
- **Product Name:** SIRIUS SOFT STARTER S0
- **Rated Current:** 32A
- **Rated Power:** 18.5 kW at 500V, 40°C
- **Input Voltage Range:**
 - 400-600V AC
 - 24V AC/DC
- **Connection Type:** Spring-type

This soft starter is designed to facilitate the smooth starting and control of the acceleration of electric motors. It can handle a rated current of 32A and a power of 18.5 kW at 500V and 40°C. The input voltage range is between 400-600V AC and 24V AC/DC, and it features spring-type terminals for convenient and secure connections.

Product	
Article Number	3RW4027-2TB05
Product Description	SIRIUS soft starter S0 32 A, 18.5 k kW/500 V, 40 °C 400-600 V AC, 24 V AC/DC spring-type terminals Thermistor motor protection
Product family	3RW40 soft starters
Product Lifecycle (PLM)	PM300:Active Product
Price data	
Price Group	42G
List Price	Show prices
Customer Price	Show prices
Surcharge for Raw Material	see also metal factor (further details are available on the help page)
Metal Factor	LAO-----
Delivery information	
Export Control Regulations	AL : N / ECCN : EAR99
Estimated dispatch time (Working Days)	5 Day(s)
Net Weight (kg)	0,775 Kg
Packaging Dimension	210,00 x 183,00 x 58,00
Package size unit of measure	MM
Quantity Unit	1 Piece
Packaging Quantity	1
Additional Product Information	
EAN	4011209695351
UPC	804766960710
Commodity Code	85371098
LKZ_FDB/ CatalogID	CC-IC10
Product Group	3727
Group Code	R711
Country of origin	Czech Republic



Shenzhen Voboal Industrial Automation Co., Ltd.



+8613760462017



sale@voboal.com



plcsimatic.com

Sienteng Zhongbao Industrial Park, Longdong Community, Baolong Street, Longgang District, Shenzhen